


PRO

LOCKNFLATE®

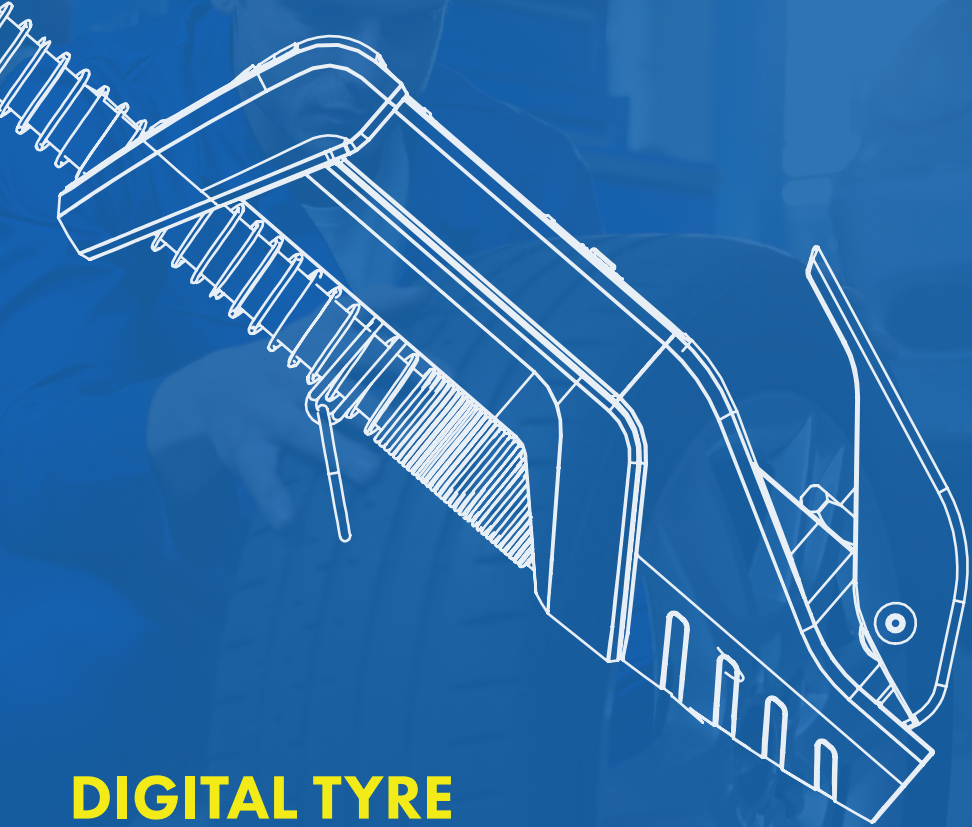

DIGITAL TYRE INFLATOR GAUGE


with LockNFlate® Dual Head Angled Air Chuck

Instruction Manual

LNL65309-BSPT

TABLE OF CONTENTS

- Introduction
- Features
- Safety Instructions & Warnings
- What's in the Box?
- Technical Specifications
- Get to know your Inflator
- General Instructions
- Operating Instructions

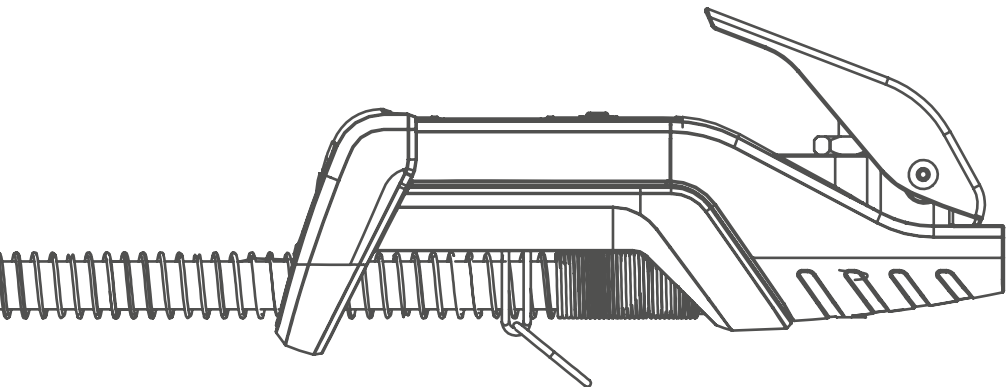


INTRODUCTION

Thank you for choosing the LockNFlate® PRO L309 Digital Tyre Inflator Gauge with Dual Head Air Chuck, engineered for fast, accurate, and reliable inflation in any environment. Featuring a rugged Die-Cast Aluminum Body with ABS shock-absorbing bumpers and TPR Shock-Absorbing Cover, this tool includes a large easy to read backlit LCD Display. Equipped with an angled Dual Head Air Chuck, it delivers a secure connection and consistent performance across a measuring range of 7–174 PSI (0.5–12 BAR) with a maximum inlet pressure of 218 PSI (15 BAR).

Ideal for cars, SUVs, trucks, motorcycles, and general workshop use, it's designed to offer maximum control, ease of use, and long-lasting durability.

FEATURES

- Wide pressure measurement range: 7–174 PSI (0.5–12 Bar)
- High accuracy ± 1 PSI (± 0.07 Bar)
- Maximum inlet pressure up to 218 PSI (15 Bar)
- LockNFlate Angled Dual Head Air Chuck, leak-free connection
- High-visibility Backlit Digital LCD (Auto-On/Auto-Off)
- Durable 32 in. (800 mm) Hybrid Polymer with Steel Spring Guard
- Fast inflation flow rate up to 900 L/min @ 174 PSI
- Inflate, deflate, and pressure measurement functions
- ABS Shock-Absorbing Bumpers and TPR Shock-Absorbing Cover
- Fully portable cordless operation
- Equipped with 2 x AAA Pre-Installed Alkaline batteries

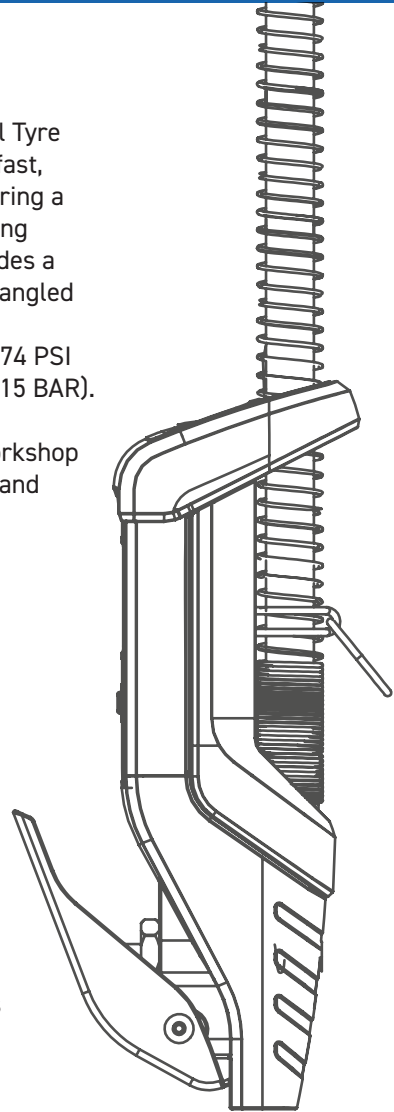

IMPORTANT


This tyre inflator must only be connected to compressed air systems that supply clean, dry air. Moisture or contaminants in the air line may cause damage to the product and can void the warranty. Use appropriate air pre-filters with this inflator to maintain accuracy, reliability, and product longevity.


SAFETY INSTRUCTIONS

- Read all instructions carefully before use.
- Do not exceed the maximum rated inlet pressure of 218 PSI (15 BAR) or the inflation range of 174 PSI (12 BAR).
- Ensure all connections are secure before inflating.
- Keep hands, face, and clothing away from moving or pressurized components.
- Always wear appropriate eye protection during operation.
- Use only 2 x AAA alkaline batteries; do not mix old and new batteries or different battery types
- Always dispose of used batteries at an authorized recycling center according to local regulations

WARNING

- Do not use the inflator if the hose, chuck, or gauge appears damaged.
- Avoid operating the inflator near flammable materials or open flames.
- Do not leave the inflator unattended while in use.
- Disconnect the unit from the air supply when not in use.
- Store the inflator in a clean, dry place away from extreme temperatures.

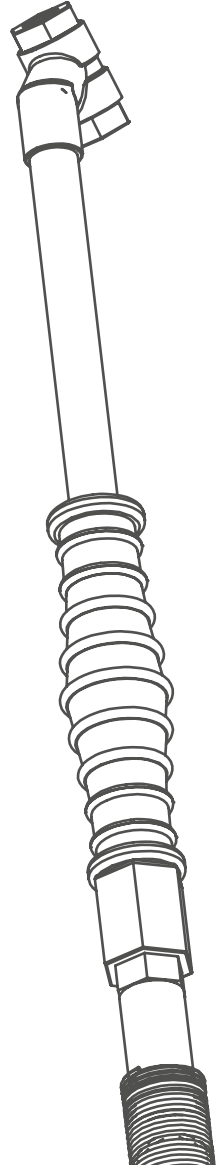

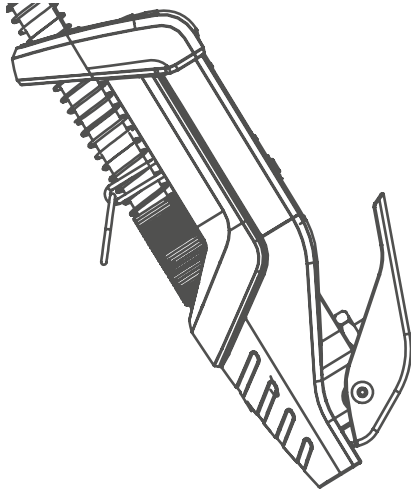

WHAT'S IN THE BOX?

LockNFlate Dual Head Air Chuck

Leak -free connection every time

Extra-Long Hose

32" (800 mm) Hybrid Polymer Hose with steel Spring Guard

Inline Hose Swivel

Smooth movement, reduces kinks

Inflator

LockNFlate L309 Digital Inflator

Fitting

N style BSPT 1/4" (M)


TECHNICAL SPECIFICATIONS

Features	Specifications
Measuring Range	7 -174 PSI (0.5 - 12 BAR)
Accuracy	±1 PSI (± 0.07 BAR)
Max Inlet Pressure	218 PSI (15 BAR)
Chuck Type	LockNFlate Dual Head Angled Air Chuck
Display	Large Backlit Digital LCD (Auto-On/Auto-Off)
Hose Length	32 in (800 mm) Hybrid Polymer with Steel Spring Guard
Inflation Flow	900 L/min @ 174 PSI
Working Temperature	14 °F to 122 °F (-10 °C to +50 °C)
Inflator Outlet Thread	BSPT 1/4" (F)
Inflator Inlet Thread	BSPT 1/4" (F)
Hose Outlet Thread	BSPT 1/4" (M)
Body / Protection	Die-Cast Aluminum with ABS + TPR Shock-Absorbing Cover
Operation	Inflate / Deflate / Measure
Battery	2 × AAA Alkaline Batteries (Pre- Installed)
Auto Functions	Auto-On when pressure sensed; Auto-Off after 90 seconds idle
Warranty	1- Year Limited Warranty
Product Dimensions / Net Weight	11.4 × 5.5 × 4.3 in (290 × 140 × 110 mm / 2.20 lb [1.0 kg])

GET TO KNOW YOUR INFLATOR

Reinforced Hybrid Polymer
Hose with Steel Spring Guard

Inflator Outlet
BSPT 1/4" (F)

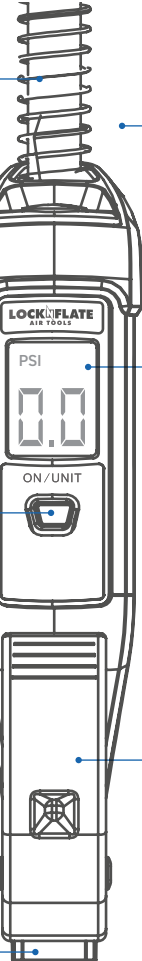


Large Backlit
Digital LCD Display

Scale Change
Button

Lever

Inlet - BSPT 1/2" (F)





N style BSPT 1/2" (M)
Fitting

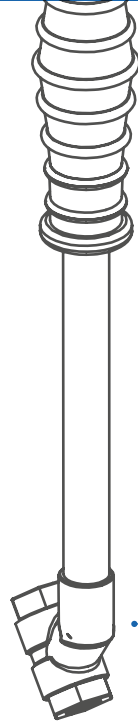

LockNFlate®
Dual Head Open
Flow Air Chuck

GENERAL INSTRUCTIONS

- **Scale Change:** Press and hold to power on; hold for 2 seconds while active to switch units: : PSI, BAR, kPa
- **Battery Install:** Unscrew cap, slide in 2 x AAA batteries (the positive (+) end facing out of the inflator), and replace cap (do not overtighten).
- **Low Battery:** Replace batteries if the icon flashes (<2.6V). The unit displays "LO" and shuts down if voltage drops below 2.5V.



OPERATING INSTRUCTIONS

To connect

Remove the tyre valve cap. Connect the LockNFlate® chuck and firmly press the chuck onto the tyre valve stem. Ensure a secure, leak-free seal.

To inflate

Release the trigger to measure the tyre pressure. Monitor the pressure on the display until the desired level is reached.

To deflate

Press the lever halfway to release air and reduce pressure. Check the display and repeat until the correct pressure is achieved.

Display

The high-visibility LCD display shows real-time pressure readings for quick and accurate monitoring.

PRO

LOCKNFLATE®

DTIG_LNF_IM_2602_JJ_V1

LOCKN LUBE

41-49 Henderson Street, Turrella NSW 2205 Sydney, Australia

Phone: 1800-185-102

Email: info@locknlube.com

For Warranty Terms and Conditions see: www.locknlube.com



Note:

This product should be disposed of according to all applicable local and national government environment regulations and guidelines.

